

TERRA 00, PENDANT

INSTALLATION GUIDE




FRAGILE FINISHES PLEASE WEAR GLOVES DURING INSTALL

DANGER: LIGHTS MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN. ELECTRIC SHOCK RISK. TURN OFF ELECTRICAL POWER BEFORE BEGINNING INSTALLATION AND USE CAUTION WHEN INSTALLING.

- PLEASE DO NOT MODIFY OR ADJUST ANY FIXTURE IN A WAY THAT IS NOT CLEARLY STATED OR INTENDED.
- ALWAYS ENSURE THE POWER IS OFF AND THE LUMINAIRE HAS COOLED DOWN BEFORE PERFORMING ANY MAINTENANCE, CLEANING OR ADJUSTMENT TO THE FITTING.
- TO AVOID INJURY OR DAMAGE TO THE LUMINAIRE, ENSURE THAT POWER LEADS AND SCREWS ARE SECURE BEFORE CONNECTING THE POWER.
- SELECT A SUITABLE LOCATION AWAY FROM LIQUIDS AND HAZARDS.
- ENSURE THAT THE LUMINAIRE DOES NOT COME IN CONTACT WITH CORROSIVE CHEMICALS/SOLVENTS OR ABRASIVE CLEANERS ETC.
- TO AVOID ELECTRIC SHOCK, DO NOT TOUCH THIS ITEM IF HANDS ARE WET.
- TO CLEAN, WIPE WITH A SOFT DAMP CLOTH, DO NOT SOAK OR IMMERSE THE LUMINAIRE IN WATER OR OTHER LIQUIDS.
- DO NOT USE IF ANY BREAKAGE OR DISTORTION IS FOUND ON THE WIRING OR SOCKET, OR IF THE PRODUCTS HAVE BEEN WET.
- MARZ DESIGNS IS NOT RESPONSIBLE FOR ANY DAMAGES CAUSED BY NOT FOLLOWING THE PROVIDED INSTRUCTIONS.
- FOR INDOOR USE ONLY.

TERRA 00, PENDANT

INSTALLATION GUIDE

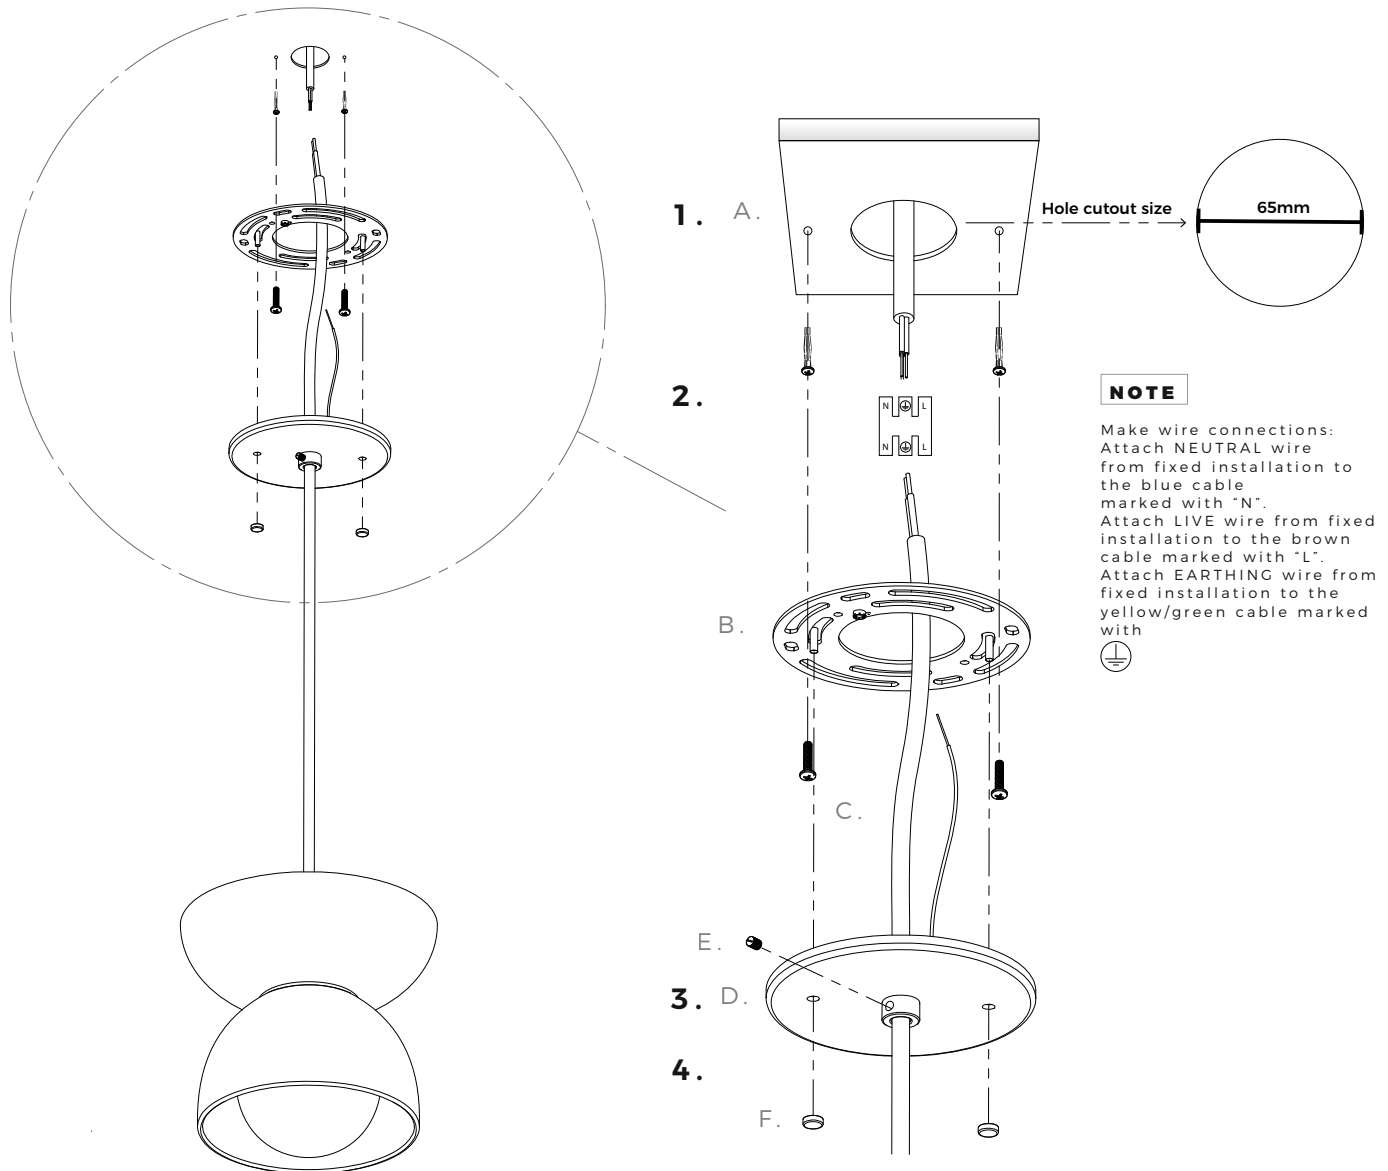

INSTRUCTIONS

1. Use Wall Anchors (not provided) to fix the Universal Mounting Plate (B) to ceiling (A). Drill 65mm Hole in ceiling using holesaw to allow for cable termination.

2. Connect electrical leads from the ceiling to the leads from the pendant. Ensure the wires are secure and no bare wires are exposed, using an enclosed junction box

3. Fully install the Canopy (D) to the ceiling over the Mounting Plate (B) and secure in place with brass screw head Covers (F) supplied.

4. Fasten the Flex (C) at the preferred hanging height with the Cord Grip (E). Feed additional Flex (C) through the ceiling to allow for future height adjustments.

ATTENTION!

PLEASE CAREFULLY READ INSTRUCTIONS BEFORE USE

PRODUCT:	Terra 00, Pendant 240V
PRODUCT CODE:	TERR-00-P-R
RATED VOLTAGE:	220-240VAC
FREQUENCY:	50 HZ
FITTING:	1 lamp 4.5W LED
LAMP TYPE:	G9

This luminaire is intended for mounting to a ceiling:

- Carefully check luminaire and wiring for damage before use. Do not use if damaged.
- Ensure that local voltage and frequency match the marking.
- For inside use only.
- Do not disassemble the structure of lamps.
- Do not leave children alone with the products.
- If the external flexible cable or cord of cards of this luminary is damaged, it shall be exclusively replaced by the manufacturer or his service agent or similar qualified person in order to avoid hazard.
- Please use reliable suspending and fixing device on ceiling to avoid danger.
- This is a Class I device and must be connected to protective grounding.
- Terminal block and connection box not included.
- Only qualified personnel may install this device. Please observe any national installation regulations.

Terminal block shall conform to IEC 60998-2-1 or IEC 60998-2-02 and must comply with the following specifications:

- With screw or screw-less terminal
- Two terminal poles;
- Rated voltage: 250 V
- Rated connecting capacity: 10 A; 3 x 0,75-1,5 mm²
- During installation, ensure that the basic insulation of supply lead cannot touch the ceiling cover, and use proper insulation so that the clearance and creepage distance between live parts and ceiling cover is more than 6,5 mm, between basic insulation of supply lead and ceiling cover is more than 3,6 mm.
- Keep terminal block inside ceiling cover or fixed on ceiling.