


INLITE

ONE-LINER

One-Liner systems use high performance Zhaga LED light engines to deliver general ambient and working plane level illumination. With integrated LED drivers and optional DALI control, One-Liner systems can be used with intelligent lighting and building management systems.

ONE-LINER

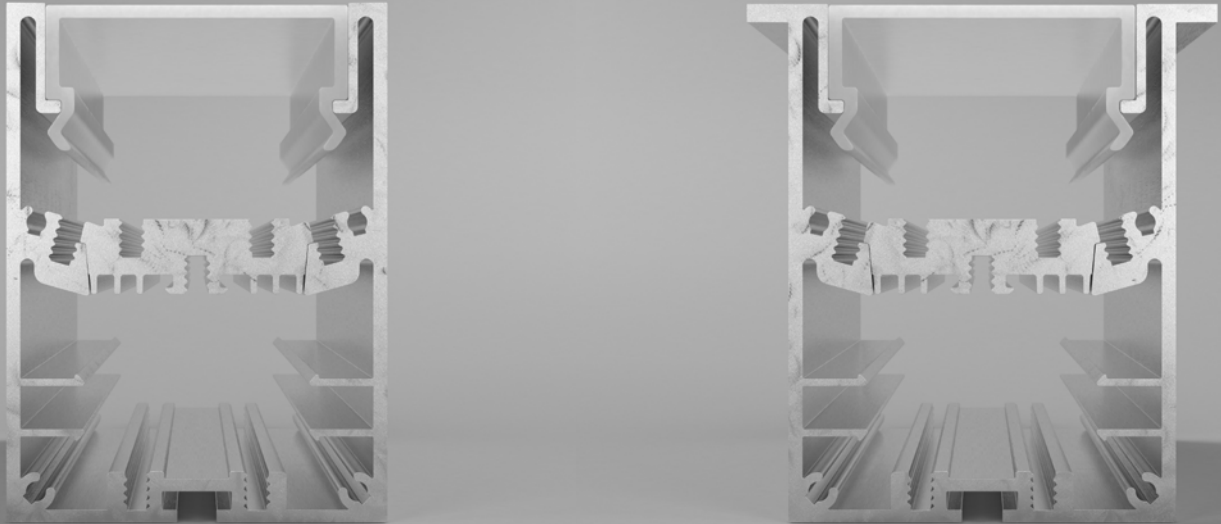


One-Liner is designed to deliver seamless lines of continuous light through specially designed lens optics in a substantial and robust extrusion. These lens optics are positioned to deliver the highest luminous efficacy whilst maintaining a homogenous diffusion of light from the luminaire.


One-Liner is available in two versions:
One-Liner 60 for surface and suspension mounting,
and One-Liner 85 for recessed applications.
Standard finishes are anodised aluminium or textured white or black powdercoat. Custom finishes are also available on request.

ONE-LINER

ONE-LINER 60



ONE-LINER 85




22W / 2571lm per metre	3000°K	•	•
43W / 4643lm per metre	3000°K	•	•
22W / 2642lm per metre	4000°K	•	•
43W / 4857lm per metre	4000°K	•	•
RECESSED MOUNTING			•
SURFACE MOUNTING		•	
SUSPENSION MOUNTING		•	
WALL MOUNTING		•	
DALI		•	•
DSI DIM		•	•
SWITCH DIM		•	•
ANODISED		•	•
BLACK		•	•
WHITE		•	•
CUSTOM		•	•

ONE-LINER



FOYER

ONE-LINER 85 43W 3000°K SYSTEM	
12m x 2	
Average lux	350lx
Recommended Lux (AS/NZS: 1680)	160lx
Ceiling Height	6m
Luminaire Height	6m
Area	225m ²
Total System Power	1032W
BCA Section J6 Maximum Power Load*	3375W
BCA Compliant scheme	Y

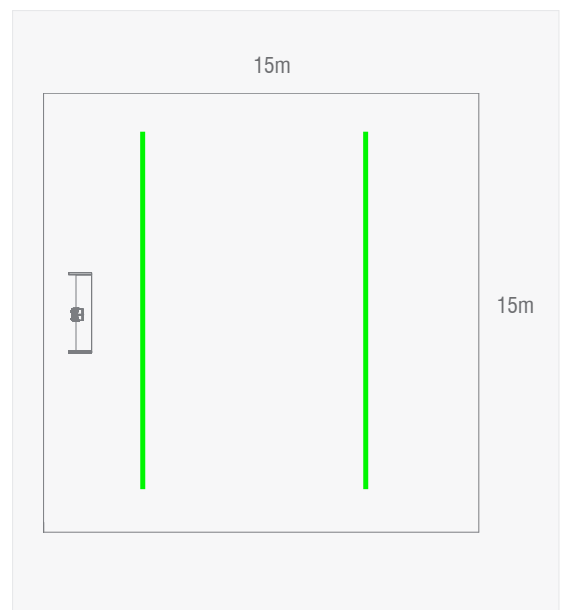


*(not including adjustment factors for control devices)

ONE-LINER



OFFICES

ONE-LINER 85 22W 3000°K SYSTEM	
12m x 6 (workstations) + 61m (perimeter)	
Average lux (room)	320lx
Working Plane Illumination (workstations)	520lx
Recommended Lux (AS/NZS: 1680)	320lx
Ceiling Height	4m
Luminaire Height (workstations / perimeter)	2.6m / 4m
Area	500m ²
Total System Power	2926W
BCA Section J6 Maximum Power Load*	4500W
BCA Compliant scheme	Y

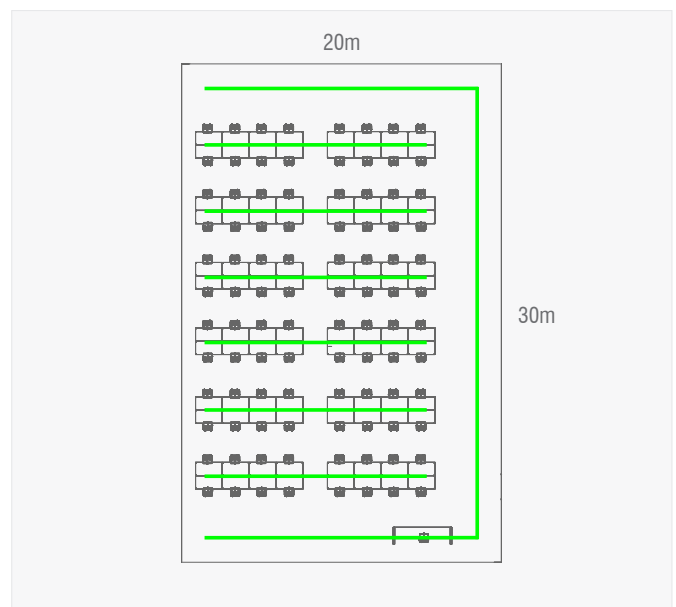


*(not including adjustment factors for control devices)

ONE-LINER



CORRIDOR

ONE-LINER 85 22W 3000°K SYSTEM	
13m x 1	
Average lux	290lx
Recommended Lux (AS/NZS: 1680)	80lx
Ceiling Height	2.6m
Luminaire Height	2.6m
Area	45m ²
Total System Power	286W
BCA Section J6 Maximum Power Load*	360W
BCA Compliant scheme	Y

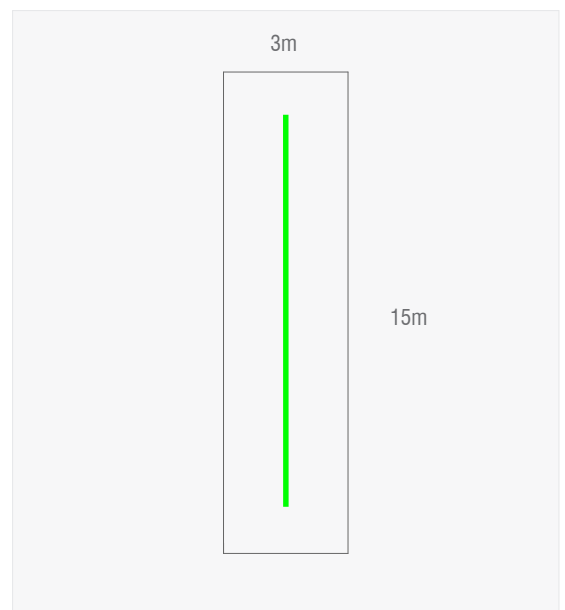

*(not including adjustment factors for control devices)

ONE-LINER



ONE-LINER



INLITE

SYDNEY

44 Chippen St
Chippendale NSW 2015
t 02 9699 3900
e nsw@inlite.com.au

MELBOURNE

80 Balmain St
Richmond VIC 3121
t 03 9429 9828
e vic@inlite.com.au

BRISBANE

111 Constance St
Fortitude Valley QLD 4006
t 07 3253 3200
e qld@inlite.com.au

PERTH

15-17 Old Aberdeen Place
West Perth WA 6005
t 08 9227 0444
e wa@inlite.com.au

ADELAIDE

39-41 Fullarton Road
Kent Town SA 5067
t 08 8362 5993
e sa@inlite.com.au

HOBART

PO Box 1071
Rosny Park TAS 7018
t 03 6243 4715
e tas@inlite.com.au

AUCKLAND

L1 Building B
8 Nugent St
Grafton 1023
t 09 623 0429
e auckland@inlite.co.nz

WELLINGTON

Level 2, Mountain Safety House
19 Tory St
Wellington 6011
t 04 894 3812
e wellington@inlite.co.nz