




**PICO
STARR**

BY

INLITE

Miniaturisation

With a diameter of only 68.5mm the new Pico Starr is the perfect balance between size and performance.

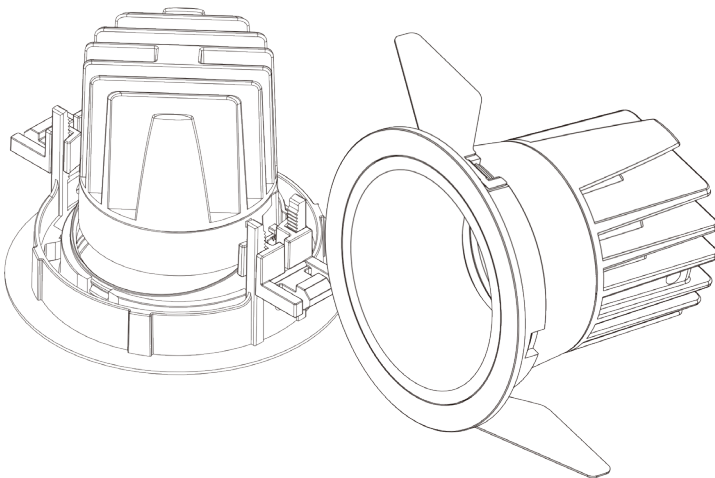


PICO STARR

BY

INLITE


Versatility

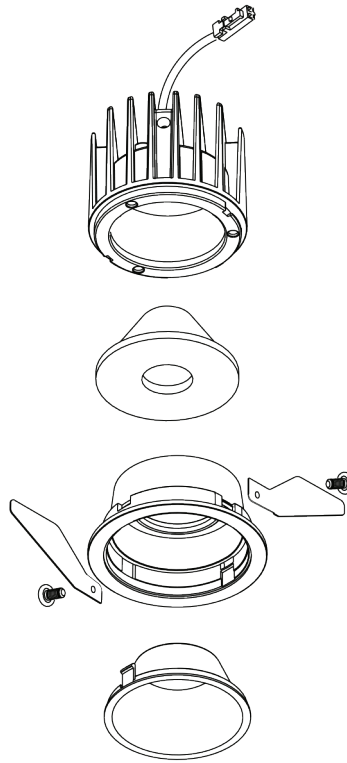

The interchangeable and flexible design of the new Pico Starr allows for a multitude of installation options and finishes.

PICO STARR RANGE

LED MODULE



9.3W LED Module

LENSES



15°



24°



36°



60°

REFLECTORS



Matt Black



Matt White



Matt Gold



Chrome



Matt Black



Matt White



Matt Gold



Chrome

MOUNTING RING



Fixed



Adjustable

PINHOLE



Fixed




Adjustable

TRIMLESS FRAME



ACCESSORIES



Honeycomb



Linear Spread Lens



Spread Lens

SNOOT




WALLWASHER





Visual Comfort

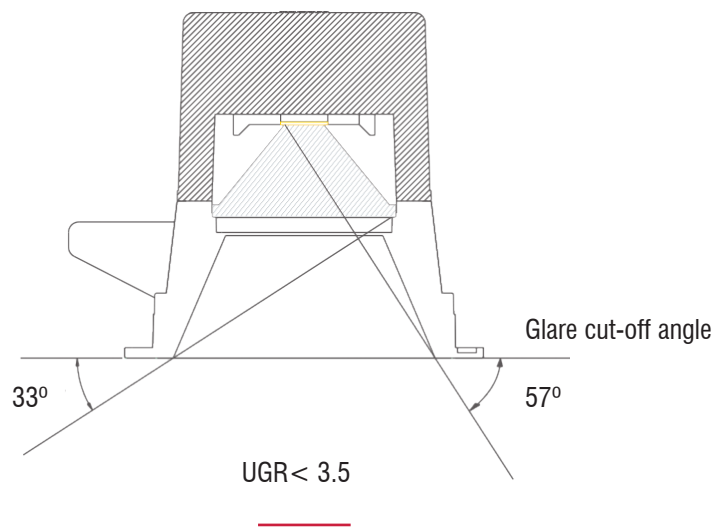


A 57 degree cut-off angle and concave LED module ensure excellent glare control and uniformity of light.

PICO STARR

IP20



2700K CRI>95	3000K CRI>95	4000K CRI>95
9.3W / 856lm / 250mA	9.3W / 896lm / 250mA	9.3W / 901lm / 250mA
36°	36°	36°
LL-9305-2736-	LL-9305-3036-	LL-9305-4036-
WW / BB / WB		
L70 >72,000HRS		

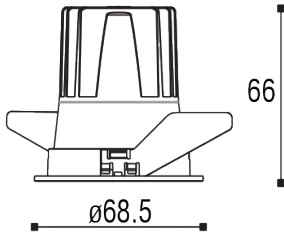

Cut out ø60mm



BLACK BLACK



WHITE BLACK

DRIVERS

250mA Phase cut	250mA DALI
LL-9300-PSU	123403/250/FP


OPTIONS

Trimless Frame	15°	24°	60°
LL-9300-KIT	LL-9302-15	LL-9302-24	LL-9302-60




ACCESSORIES


Honeycomb Lens	Linear Spread Lens	Spread Lens	Chrome Reflector	Matt Gold Reflector
LL-9301-HC	LL-9301-LSL	LL-9301-SL	LL-9305-REF-C	LL-9305-REF-MG

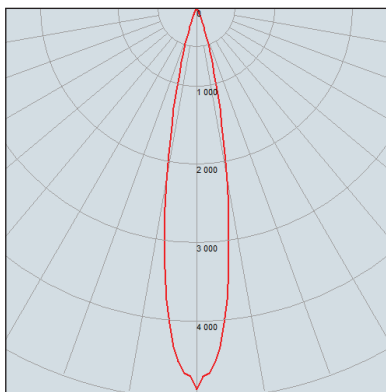

15deg / 4878cd / 660lm

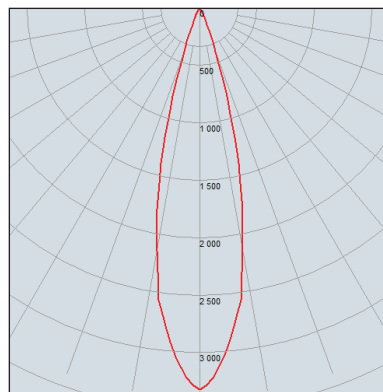

24deg / 3370cd / 681lm

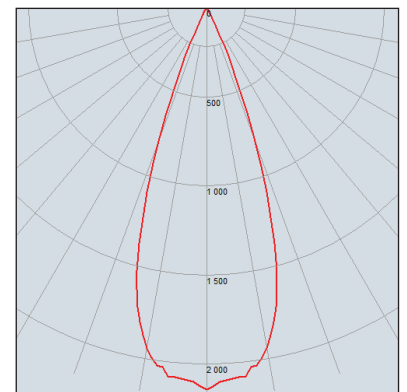

36deg / 2162cd / 721lm



Exceptional Colour Quality

With an impressive high colour rendering index of 95 and above combined with a R9 value >90 , Pico Starr LED modules can accurately render a larger spectrum of colours delivering purity of colour and better quality of light.


Constant Colour Consistency

Pico Starr LED's are binned within 3-step MacAdam ellipse, ensuring a constant and consistent white across the life span of the LED engine.



PICO STARR ADJUSTABLE

IP20

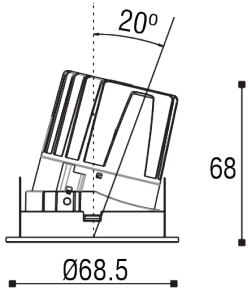

Cut out Ø60mm



BLACK BLACK



WHITE BLACK

2700K CRI>95	3000K CRI>95	4000K CRI>95
9.3W / 853lm / 250mA	9.3W / 896lm / 250mA	9.3W / 901lm / 250mA
36°	36°	36°
LL-9310-2736-	LL-9310-3036-	LL-9310-4036-
WW / BB / WB		
L70 >72,000HRS		

DRIVERS

250mA Phase cut	250mA DALI
LL-9300-PSU	123403/250/FP


OPTIONS

Trimless Frame	15°	24°	60°
LL-9300-KIT	LL-9302-15	LL-9302-24	LL-9302-60




ACCESSORIES


Honeycomb Lens	Linear Spread Lens	Spread Lens	Chrome Reflector	Matt Gold Reflector
LL-9301-HC	LL-9301-LSL	LL-9301-SL	LL-9310-REF-C	LL-9310-REF-MG

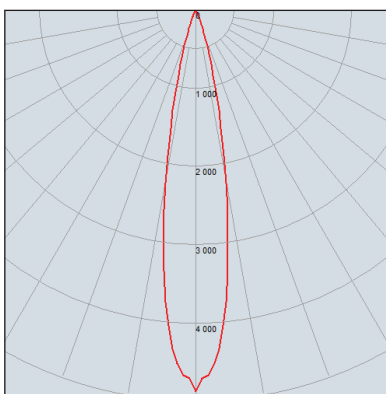

15deg / 4878cd / 660lm

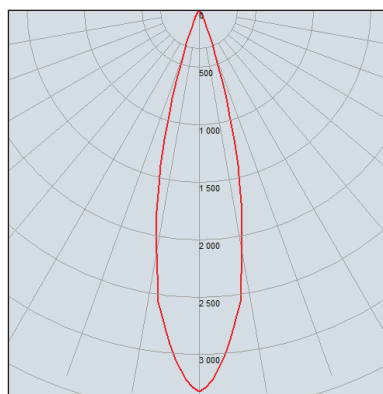

24deg / 3370cd / 681lm

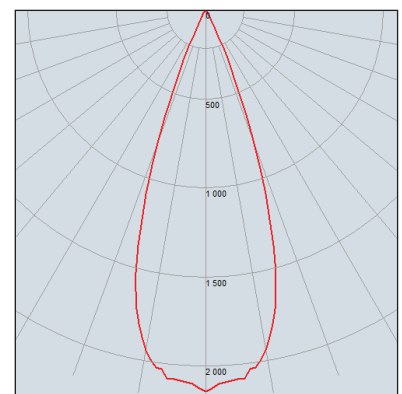

36deg / 2162cd / 721lm

PICO STARR IP54


IP54



2700K CRI>95	3000K CRI>95	4000K CRI>95
9.3W / 853lm / 250mA	9.3W / 896lm / 250mA	9.3W / 901lm / 250mA
36°	36°	36°
LL-9320-2736-	LL-9320-3036-	LL-9320-4036-
WW / BB / WB L70 >72,000HRS		



BLACK BLACK

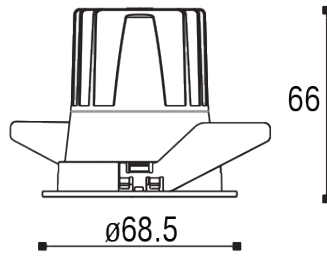

Cut out ø60mm



WHITE BLACK

DRIVERS

250mA Phase cut	250mA DALI
LL-9300-PSU	123403/250/FP

OPTIONS

Trimless Frame
LL-9300-KIT



ACCESSORIES

Honeycomb Lens	Linear Spread Lens	Spread Lens	Chrome Reflector	Matt Gold Reflector
LL-9301-HC	LL-9301-LSL	LL-9301-SL	LL-9305-REF-C	LL-9305-REF-MG




PICO STARR PINHOLE

IP20



2700K CRI>95	3000K CRI>95	4000K CRI>95
9.3W / 856lm / 250mA	9.3W / 896lm / 250mA	9.3W / 901lm / 250mA
36°	36°	36°
LL-9306-2736-	LL-9306-3036-	LL-9306-4036-
WW / BB		
L70 >72,000HRS		

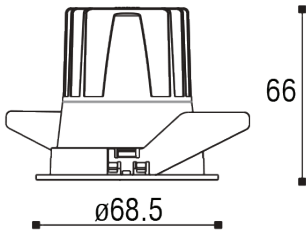

BLACK BLACK


Cut out ø60mm

PICO STARR PINHOLE ADJUSTABLE

IP20



2700K CRI>95	3000K CRI>95	4000K CRI>95
9.3W / 853lm / 250mA	9.3W / 896lm / 250mA	9.3W / 901lm / 250mA
36°	36°	36°
LL-9311-2736-	LL-9311-3036-	LL-9311-4036-
WW / BB		
L70 >72,000HRS		

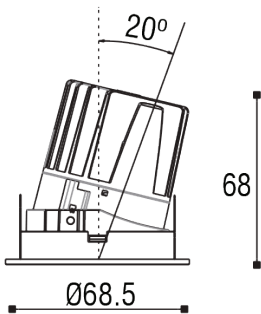

BLACK BLACK

Cut out ø60mm

DRIVERS

250mA Phase cut	250mA DALI
LL-9300-PSU	123403/250/FP

OPTIONS

Trimless Frame	15°	24°	60°
LL-9300-KIT	LL-9302-15	LL-9302-24	LL-9302-60






PICO STARR SNOOT

IP20



2700K CRI>95	3000K CRI>95	4000K CRI>95
9.3W / 853lm / 250mA	9.3W / 896lm / 250mA	9.3W / 901lm / 250mA
36°	36°	36°
LL-9330-2736-	LL-9330-3036-	LL-9330-4036-
WB / BB		
L70 >72,000HRS		

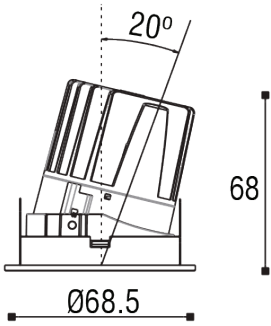

Cut out ø60mm



BLACK BLACK

DRIVERS


250mA Phase cut	250mA DALI
LL-9300-PSU	123403/250/FP

OPTIONS

Trimless Frame	15°	24°	60°
LL-9300-KIT	LL-9302-15	LL-9302-24	LL-9302-60



TRIMLESS KIT INSTALLATION

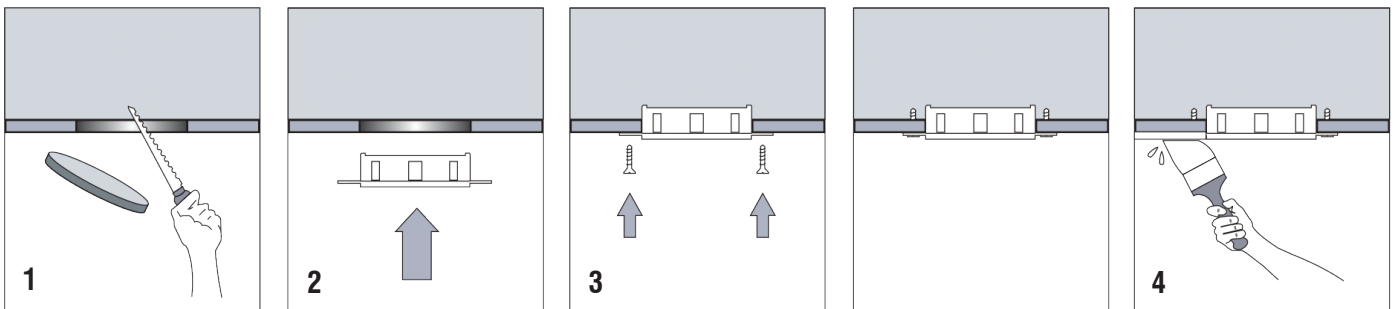


1. Cut out ø75mm
2. Insert the trimless frame
3. Screw the frame in place with self-tapping screws
4. Plaster and paint



Even Illumination



Pico Starr wallwasher is designed to illuminate walls with an even wash of light creating depth within a room.

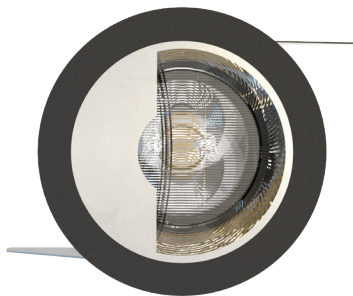


PICO STARR WALLWASHER

IP20



2700K CRI>95	3000K CRI>95	4000K CRI>95
9.3W / 853lm / 250mA	9.3W / 896lm / 250mA	9.3W / 901lm / 250mA
Wallwasher	Wallwasher	Wallwasher
LL-9315-2715-	LL-9315-3015-	LL-9315-4015-
WW / BB		
L70 >72,000HRS		

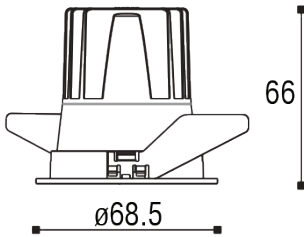

Cut out $\varnothing 60\text{mm}$





BLACK BLACK

DRIVERS

250mA Phase cut	250mA DALI
LL-9300-PSU	123403/250/FP

SPACING FORMULA

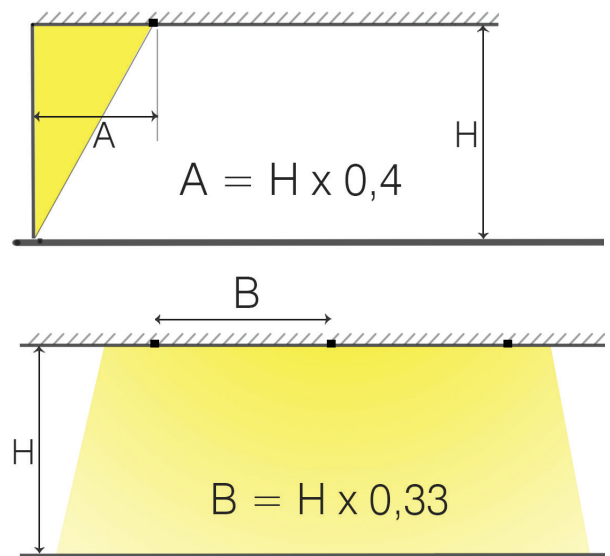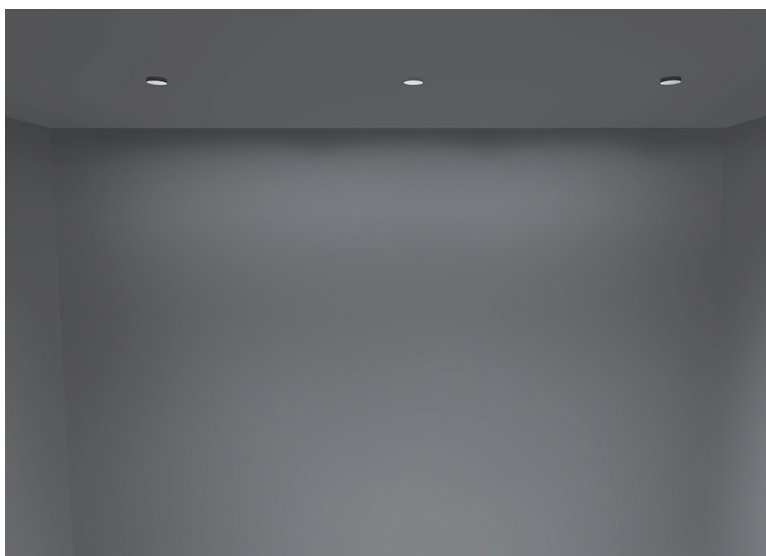

PICO STARR

BY

INLITE

Sydney
NEW SOUTH WALES

PHONE 08 8384 1000
ADDRESS 44-46 Chippen Street
Chippendale NSW 2008
EMAIL NSW@inlite.com.au

Melbourne
VICTORIA

PHONE 03 8394 1999
ADDRESS 80 Balmain Street
Richmond VIC 3121
EMAIL VIC@inlite.com.au

Brisbane
QUEENSLAND

PHONE 07 3621 9290
ADDRESS Level 1, 54 Berwick Street
Fortitude Valley QLD 4006
EMAIL QLD@inlite.com.au

Perth
WESTERN AUSTRALIA

PHONE 07 3621 9290
MOBILE 0400 399 936
EMAIL WA@inlite.com.au

Adelaide
SOUTH AUSTRALIA

PHONE 08 8362 5993
ADDRESS 98 Fullarton Road
Norwood SA 5067
EMAIL HELLO@inlitesa.com.au

Hobart
TASMANIA

PHONE 03 6231 5599
ADDRESS 34 Federal Street
North Hobart Tasmania 7000
EMAIL INFO@southernlighting.com.au

INLITE.com.au

Auckland
NEW ZEALAND

PHONE 09 777 7222
ADDRESS Level 1, 28 Ponsonby Rd
Ponsonby AUCKLAND 1011
EMAIL SALES@inlite.co.nz

Wellington
NEW ZEALAND

PHONE 04 894 3812
ADDRESS Level 1, 3 Swan Lane
Te Aro WELLINGTON 6011
EMAIL WELLINGTON@inlite.co.nz

INLITE.co.nz