




1M 45-16 PROFILE ANODISED
B8504ANODA_1
SILVER ANODISED
Remote CONTROL GEAR
IP20
CURRENT: YmA
VOLTAGE: 12V, 24V

Small dimensions (16 mm x 16mm) The profile directs the light at a 45-degree angle Can be sealed by Klus in fixed lengths to achieve an IP67 waterproof rating

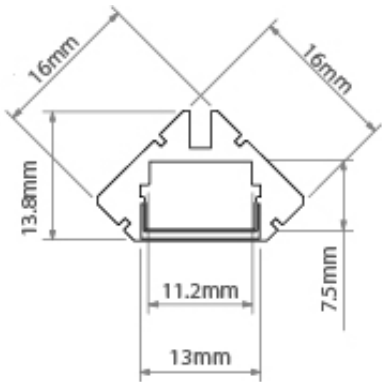

<b>Accessories</b>	
42217	HEAD Z0
00645	FASTENER DP-MOC
802	CABLE GROMMET 8.8X1.2 HR-ALU, KIDES-DUO