


1M LINO PROFILE ANODISED
B8287ANODA_1
SILVER ANODISED
Remote CONTROL GEAR
IP20
CURRENT: YmA
VOLTAGE: 24V

Minimum dimensions for creating lines of light Effect of a narrow line of light Can be sealed by Klus in fixed lengths to achieve an IP67 waterproof rating

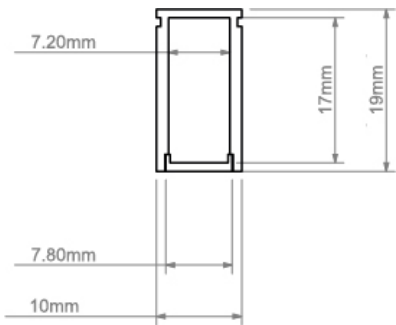

Accessories

802

CABLE GROMMET 8.8X1.2 HR-ALU, KIDES-DUO
