




1M MICRO-ALU PROFILE ANODISED
B1888ANODA_1
SILVER ANODISED
Remote CONTROL GEAR
IP20
CURRENT: YmA
VOLTAGE: 12V, 24V

Minimum dimensions for LED strips 10 mm wide Simple assembly Versatile applications Light weight Can be sealed by Klus in fixed lengths to achieve an IP67 waterproof rating

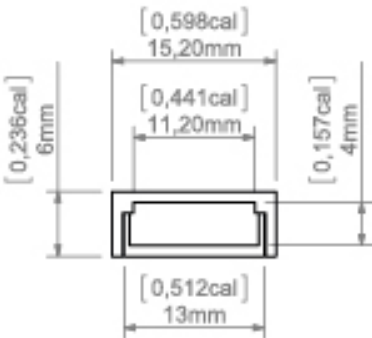

Components	
1060	END CAP MICRO-ALU WITH HOLE
20001	END CAP ECO-MICRO