



1M MICRO-ALU PROFILE BLACK ANODISED

B1888K7_1

BLACK ANODISED


Remote CONTROL GEAR

IP20

CURRENT: YmA

VOLTAGE: 12V, 24V

Minimum dimensions for LED strips 10 mm wide Simple assembly Versatile applications Light weight Can be sealed by Klus in fixed lengths to achieve an IP67 waterproof rating

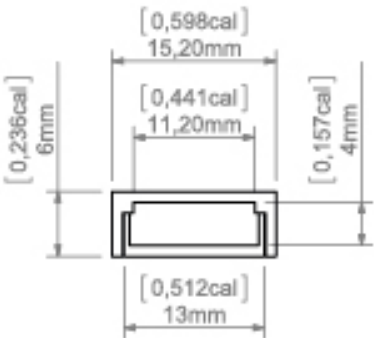

Components	
1060	END CAP MICRO-ALU WITH HOLE
20001	END CAP ECO-MICRO