


1M MICRO-K PROFILE ANODISED
B3775ANODA_1
SILVER ANODISED
Remote CONTROL GEAR
IP20
CURRENT: YmA
VOLTAGE: 12V, 24V

Masks the edges of the groove Recessed shallow housing for LED strips up to 10 mm wide Can be sealed by Klus in fixed lengths to achieve an IP65 or IP67 waterproof rating

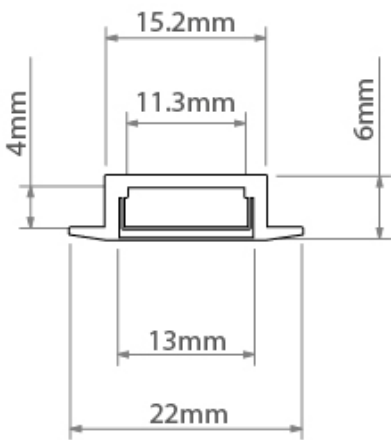

<b>Accessories</b>	
00036_2	MW BASE 11X5 2M LED
00035	MW BASE 11X5 33MM

<b>Components</b>	
21004	END CAP ECO-MICRO-K WITH HOLE
20004	END CAP ECO-MICRO-K
00025	END CAP MICRO-K-MW
23004	END CAP ECO-MICRO-K-MW WITH HOLE
00308	END CAP MICRO-K-MW WITH HOLE
00308	END CAP MICRO-K-MW WITH HOLE