


1M OLEK PROFILE ANODISED
B8505ANODA_1
SILVER ANODISED
Remote CONTROL GEAR
IP20
CURRENT: YmA
VOLTAGE: 12V, 24V

Possible obtaining a circular cross-section of the lighting fixture (together with the LUK cover) Smooth walls ensure modern aesthetics Possible systemic suspension of the profile (KLUŠ accessories) Can be sealed by Klus in fixed lengths to achieve an IP67 waterproof rating

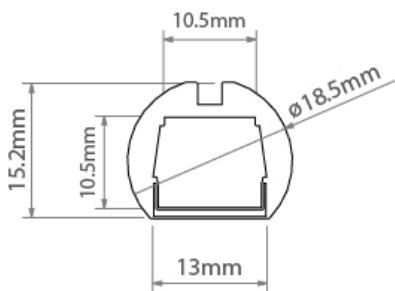

Accessories	
00655	FASTENER DP-ZZ-PDS-0
42716	CONNECTOR ZM 90
42719	CONNECTOR ZMPION 135
42718	CONNECTOR ZMPION 90