


1M PDS-4-ALU PROFILE BLACK ANODISED
B1718K7_1
BLACK ANODISED
Remote CONTROL GEAR
IP20
CURRENT: YmA
VOLTAGE: 12V, 24V

For multiple applications Minimum dimensions for LED strips 10 mm wide Ability to obtain a line of light Can be sealed by Klus in fixed lengths to achieve an IP65 or IP67 waterproof rating

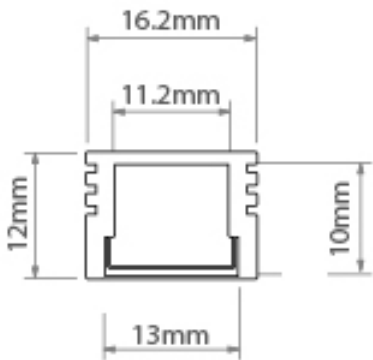

<b>Accessories</b>	
00036_2	MW BASE 11X5 2M LED
00035	MW BASE 11X5 33MM
42150	CONNECTOR PD-MICRO

<b>Components</b>	
00027	END CAP PDS4-ALU-MW WITH HOLE
00026	END CAP PDS4-ALU-MW
20002	END CAP ECO-PDS4 WHITE
21002	END CAP ECO-PDS4 WHITE WITH HOLE