


1M PDS4-K PROFILE ANODISED
B3776ANODA_1
SILVER ANODISED
Remote CONTROL GEAR
IP20
CURRENT: YmA
VOLTAGE: 12V, 24V

Ability to create a line of light Masking the channel edge Can be sealed by Klus in fixed lengths to achieve an IP65 or IP67 waterproof rating

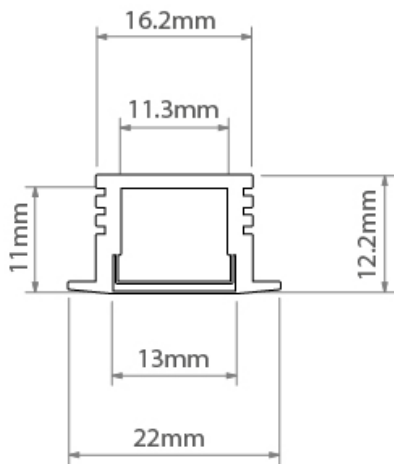

Accessories	
00035	MW BASE 11X5 33MM
20005	END CAP ECO-PDS4-K
21005	END CAP ECO-PDS4-K WITH HOLE

Components	
00309	END CAP PDS4-K-MW WITH HOLE
00032	END CAP PDS4-K-MW