




1M PIKO-ZM PROFILE ANODISED
C1168ANODA_1
SILVER ANODISED
Remote CONTROL GEAR REMOTE
IP20
CURRENT: YmA
VOLTAGE: 24V

Ability to build fixtures going seamlessly from recessed to suspended Very small size (only 10 mm wide) The PIKO-ZM lighting fixture is bendable Easy LED servcability Fits in the thickness of a drywall board (12mm) Ability to build light strings (with ZM connectors) TEPIKO features a "TEPIKO protective insert", which facilitates clean mounting of the fixture in drywall

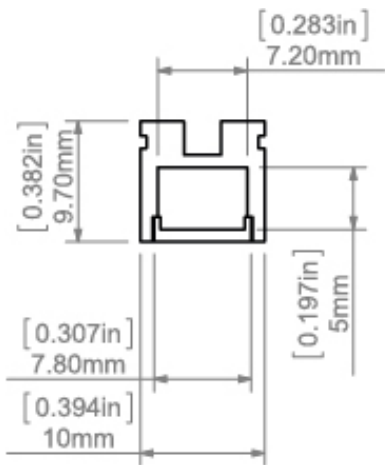

Accessories	
42520	BLOCKADE ZM
42716	CONNECTOR ZM 90
42719	CONNECTOR ZMPION 135
42718	CONNECTOR ZMPION 90