




2M MICRO-H PROFILE ANODISED
C0599ANODA_2
SILVER ANODISED
Remote CONTROL GEAR
IP20
CURRENT: YmA
VOLTAGE: 12V, 24V

Clean design of the lighting fixture Easy snap-in mounting and dismounting Small size Can be sealed by Klus in fixed lengths to achieve an IP67 waterproof rating

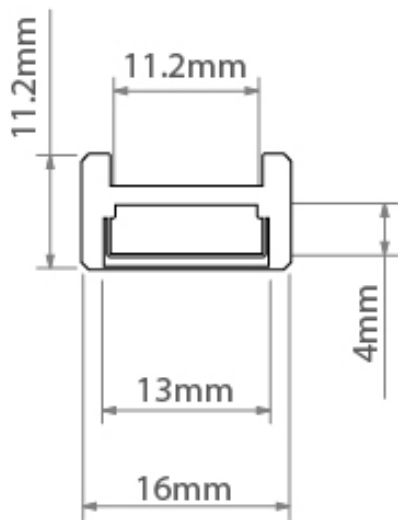

---

**Accessories**

---

802

CABLE GROMMET 8.8X1.2 HR-ALU, KIDES-DUO

---