

2M MICRO-HG PROFILE ANODIZED

C1419ANODA_2

SILVER ANODISED


Remote CONTROL GEAR REMOTE

IP20

CURRENT: YmA

VOLTAGE: 12V, 24V

Can be easily and quickly attached to and removed from the surface Conceals the light source - the brightest, contrasting element of the lighting fixture. Narrow light angle The recessed cover eliminates the gleaming effect Allows the use of more efficient, transparent covers without compromising the aesthetics of the lighting fixture (LED points remain invisible)

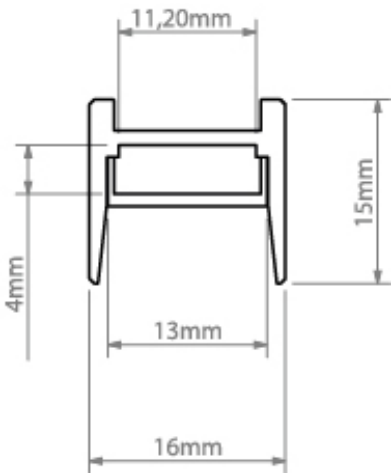

Accessories	
802	CABLE GROMMET 8.8X1.2 HR-ALU, KIDES-DUO

Components	
24319	END CAP MICRO-G