



2M PDS-4-ALU PROFILE WHITE

B1718L9010\_2

WHITE


Remote CONTROL GEAR

IP20

CURRENT: NmA

VOLTAGE: 12V, 24V

For multiple applications Minimum dimensions for LED strips 10 mm wide Ability to obtain a line of light Can be sealed by Klus in fixed lengths to achieve an IP65 or IP67 waterproof rating

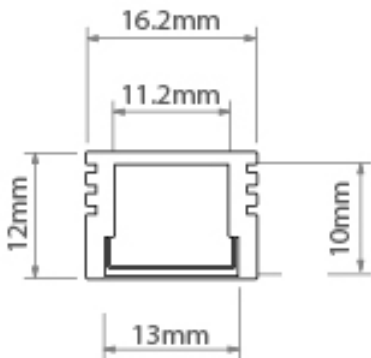

|                    |                     |
|--------------------|---------------------|
| <b>Accessories</b> |                     |
| 00036_2            | MW BASE 11X5 2M LED |
| 00035              | MW BASE 11X5 33MM   |
| 42150              | CONNECTOR PD-MICRO  |

|                   |                                  |
|-------------------|----------------------------------|
| <b>Components</b> |                                  |
| 00027             | END CAP PDS4-ALU-MW WITH HOLE    |
| 00026             | END CAP PDS4-ALU-MW              |
| 20002             | END CAP ECO-PDS4 WHITE           |
| 21002             | END CAP ECO-PDS4 WHITE WITH HOLE |