


2M PDS-O PROFILE ANODISED
B3777ANODA_2
SILVER ANODISED
Remote CONTROL GEAR
IP20
CURRENT: YmA
VOLTAGE: 12V, 24V

Appealing form Ability to create a line of light Good heat dissipation Can be sealed by Klus in fixed lengths to achieve an IP65 or IP67 waterproof rating

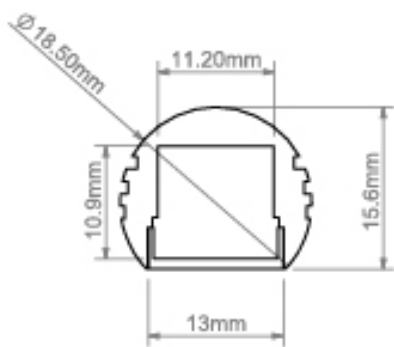

Accessories	
00035	MW BASE 11X5 33MM
Components	
00029	END CAP PDS-O-MW WITH HOLE
24059	END CAP PDS-O-MET