


akzu Tracron M6 Track Lights

Product Data Sheet

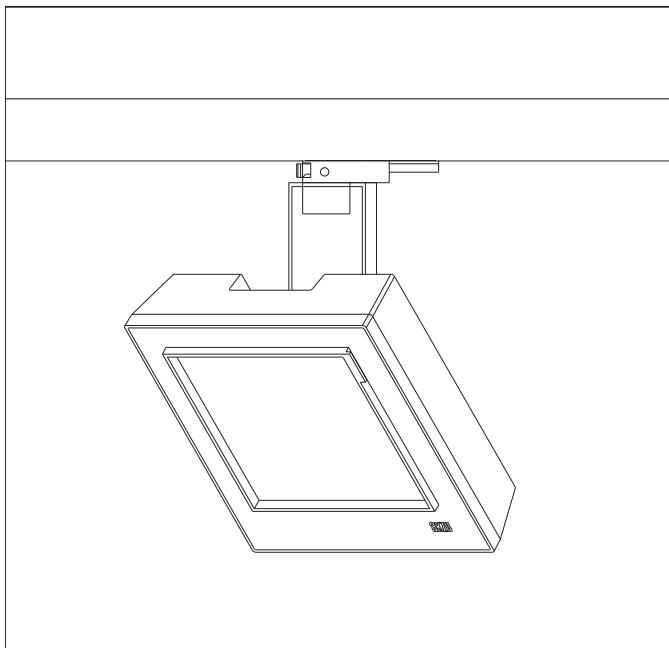

601685.000

Technical Data


Light source: LED
Wattage: 40W
Voltage: 220-240VAC
Nominal luminous flux: 3420lm
Beam angle: 29°, flood
Color temperature: 3000K, warm white
Color Rendering Index: 95

Technical Characteristics


Protection degree: IP20 (En60598)
Insulation class: Class I (En60598)

Product Description


Housing and bracket: cast aluminium, powder-coated, White. 0°- 90°tilt.
Bracket rotatable through 360°on 3-circuit adapter.
3-circuit adapter: plastic.
Including electronic control, DALI Plug & Play.
Replaceable LED module: high-power LEDs on metal-core PCB, Collimating lens made of optical polymer.
Front cover: plastic.
Weight: 1.60kg




Dimension



Lighting Distribution Planning Data



H(m)	D(m)	E(lx)
2	1.02	2736
4	2.04	684
6	3.06	304
8	4.08	171
10	5.10	109



$\eta_{LOR}=80\%$
UGR=12.7

E[lx]	100lx	500lx
a[m ²]	n=4	n=19
100		

All data, images, and specifications are for reference only and may be changed due to product improvement without prior notice.

More details at
www.akzu.com/601685



3 circuit track



Surface mounted universal mono track point



Recessed mounted universal mono track point



Replaceable accessories principal lens



Anti-glare slides



Barn door